


TEA,TPE,2UTPX24,CM,EN,CAT5E,SND Industrial Ethernet Cable – Reelfast™ Bulk Cable




Features

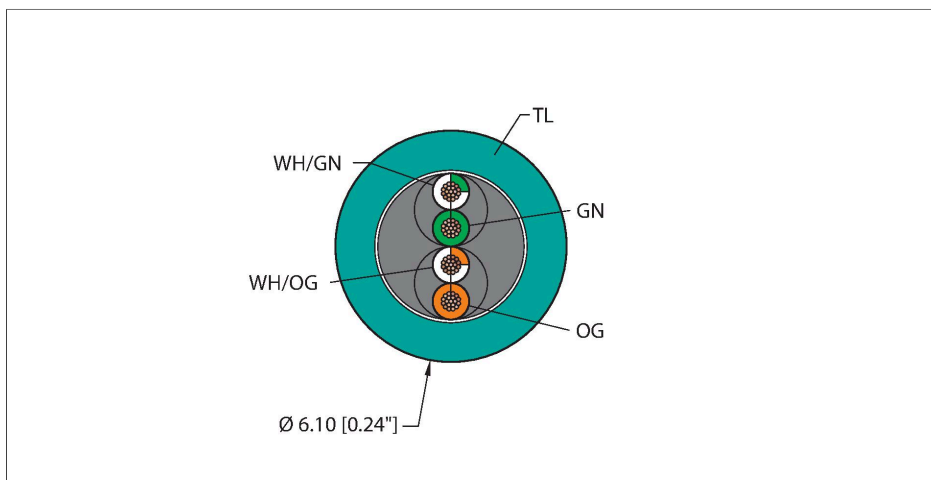

- Unshielded Twisted Pair
- Industrial Ethernet Cable
- fieldbus type: Ethernet CAT5E, TPE jacket, Teal, 2UTPX24 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL 1685, UL1061
- Flexlife® and C-Track Approved
- UL AWM 600V
- UL/CSA CMX OUTDOOR 300V
- CM 300V

Circuit Diagram

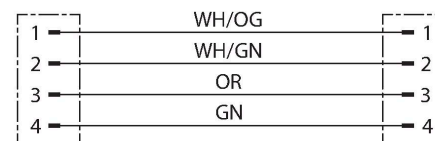

Technische Daten

Type	TEA,TPE,2UTPX24,CM,EN,CAT5E,SND
ID	RF51210
Cable data	
Cable Platform	Industrial Ethernet Cable
Fieldbus	Ethernet CAT5E, 440/4460
Total number of conductors	4
Cable diameter	Ø 6.1 mm
Cable jacket	TPE, Teal
Conductor material	TC (tinned copper)
Conductor colors	WH/GN, GN, WH/OG, OG
Description of assembly	UTP (Unshielded Twisted Pair)
Number of pairs	2
Conductor diameter	0.042 "
Conductor insulation material	HDPE
Cable conductor cross-section	2x24 AWG [Similar to 0.25 mm ²]
Number of strands x O.D.	7x32 AWG
Weight	0.026 lbs. /meter
Electrical properties at +20 °C	
Voltage	UL AWM 600V UL/CSA CMX OUTDOOR 300V CM 300V
Dielectric strength	2000 V RMS
Mutual capacitance	1kHz 5.6 nF/100m
Rated voltage	600 V

TEA,TPE,2UTPX24,CM,EN,CAT5E,SND| 22-02-2025 02-06 | Technische Änderungen vorbehalten

Technische Daten

DC resistance	26.5 Ω /1000ft
DC resistance imbalance	5 %
Coupler loss	30 \leq f \leq 100 MHz 55-20 LOG (f/100) dB MIN, 55 dB min
Transmission impedance of the surface	1 \leq f \leq 100 MHz 10 f m Ω /m
Cable test information	Starting at the reel, the following items are checked. (100-m cable)
Capactance pair to ground	MAX 1kHz 330 pF/100m
Return loss 1	1 \leq f < 10 MHz 20 + 5 LOG(f) dB min.
Return loss 2	10 \leq f < 20 MHz 25 dB min.
Return loss 3	20 \leq f \leq 100 MHz 25 - 7 LOG(f/20) dB min.
Insertion loss	1 \leq f \leq 100 MHz 1.2[1.967 \sqrt{f} + 0.023(f) + 0.050/ \sqrt{f}] dB max.
Close-range cross talk	1 \leq f \leq 100 MHz 35.3 - 15 LOG(f/100) dB min
Ratio of loss — Long-range cross talk	1 \leq f \leq 100 MHz 23.8 - 20 LOG(f/100) dB min.
Runtime delay	1 \leq f \leq 100 MHz 534 + 36/ \sqrt{f} ns max
Runtime delay offset	1 \leq f \leq 100 MHz <25ns
Mechanical and chemical properties	
Bending radius (static)	\geq 4 x \emptyset
Bending radius (dynamic)	\geq 10 x \emptyset
Bending radius (C-track)	\geq 4 ln.
Bending cycles (C-track)	35 Million *
Admissible acceleration	Max. 16.7 m/s ²
Admissible travel path, horizontal	0.6 m (at 16.7 m/s ²)
Admissible traversing speed	1.2 m/s
Torsional stress	\pm 270 $^\circ$ /m
Torsion rating	Max. 3 million
Torsional stress	52 Cycles/min
UL cold bend rating	-40 $^\circ$ C
	*When properly installed @ 20 $^\circ$ C, 50%RH, and a cycle speed of \leq 0.5 cycles per second.
C-Track	Yes
Ambient temperature range (static)	-40...+80 $^\circ$ C
Ambient temperature range (dynamic)	5...+80 $^\circ$ C
Temperature range (installation)	-10...+80 $^\circ$ C
Approval	
UL Approvals	UL 444 CMX OUTDOOR-CM

Technische Daten

	UL 758 AWM 2463
CSA Approvals	CMX OUTDOOR-CM
Compliances	RoHS CE
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.